



Taylor Building Systems




2479 County Street 2865
 Chickasha, OK 73018
 Phone: 405-222-0751
 Fax: 405-222-3301
 www.taylor-sons.com



Polar White †



Brilliant White

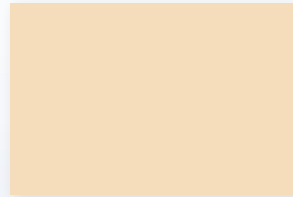

Light Stone †



Ash Gray



Saddle Tan †




Koko Brown




Hawaiian Blue



Deep Blue*

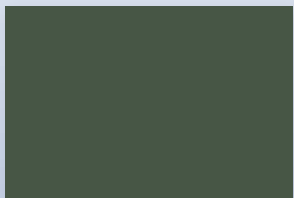

Evergreen

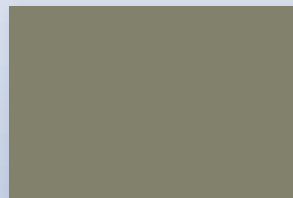

Colony Green



Burgundy



Crimson Red



Desert Sand



Rural Red




Rustic Red †




Burnished Slate




Charcoal Gray

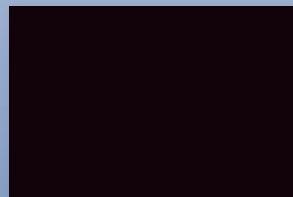

Black

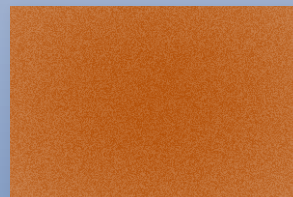

Copper Metallic*

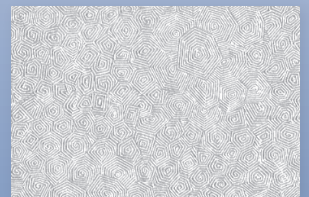

Galvalume

Color samples shown on this page may vary slightly with actual paint color. Actual paint samples are available. We reserve the right to change our color offering at any time.

All colors available in 26 gauge.

* Premium colors (non-standard pricing).

† 10 year paint warranty on select colors.


All colors available in a 40 year paint warranty.




PROUDLY FINISHED WITH
SHERWIN-WILLIAMS.
 Coil Coatings




"R" PANEL

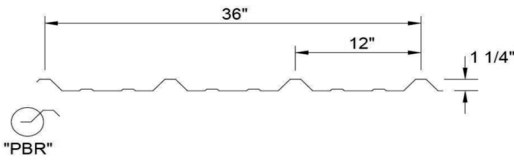

"AG" PANEL

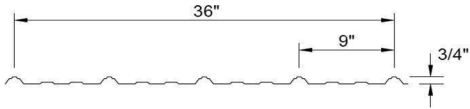

"U" PANEL

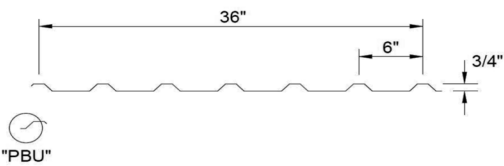


Commercial Standing Seam 16", 18" Wide




Striations Optional
Mechanically seamed

T-12 Soffit Panel 12", 14", 16" Wide



Striations Optional

Residential Standing Seam 12" wide



Striations Optional

WeatherXL Valspar

Hot Dipped Galvanized Steel

Galvalume

Film thickness

Primer (PMY0302)

0.2 to 0.3 mil (front side)

0.2 to 0.3 mil (front side)

0.1 to 0.2 mil (back side)

0.1 to 0.2 mil (back side)

Topcoat

0.7 to 0.8 mil

0.7 to 0.8 mil

Backer

0.3 to 0.4 mil

0.3 to 0.4 mil

Accelerated Weathering

Hours: 200 Total

Chalk : Rating no less than 8

Hours: 200 Total

Chalk : Rating no less than 8

Color: No more than 5 ΔE

Color: No more than 5 ΔE

Hunter Color Units Max

Hunter Color Units Max

ASTM G 23

(Dew Cycle

Weatherometer)

Humidity

ASTM D 2247

ASTM D 1654

Formability

ASTM D 1737

Pencil Hardness

ASTM D 3363

F - 2H

F - 2H

Specular Gloss

ASTM D 523

25 - 35 at 60**

25 - 35 at 60**

Impact Resistance

3 x Metal Thickness
in inch-lb*

3 x Metal Thickness
in inch-lb*

ASTM D 2794

No Cracking and

No Loss of Adhesion

No Cracking and

No Loss of Adhesion

Abrasion Resistance

Falling Sand

35 Plus or minus 5 liters

Falling Sand

35 Plus or minus 5 liters

Paint warranty details available upon request

